



									IN (MM) RIGHT HAND SHOWN					
MODEL	A	B	<u>C</u>	D	E	F	G	H	Ī	ĸ	Ŀ	FILTER SIZE		
800	24 1/8"	20 1/4"	27 1/2	8 3/4"	11 3/4"	7 11/16"	6"	18"	3 3/8"	1 1/4"	12 3/4"	(1) 20x20x2		
MM	612.78	514.35	698.50	222.25	298.45	195.26	152.40	457.20	85.73	31.75	323.85			
1200	30 1/8"	20 1/4"	33 1/2"	13 1/2"	11 3/4"	8 5/16"	6 9/16"	23"	3 1/2"	1 1/4"	12 3/4"	(1) 20x25x2		
MM	765.18	514.35	850.90	342.90	298.45	211.14	166.69	584.20	88.90	31.75	323.85			
1600	38 1/8"	20 1/4"	41 1/2"	13 1/2"	12 3/4"	12 5/16"	6 1/8"	30 3/4"	3 7/8"	1 1/4"	12 3/4"	(2) 16x20x2		
MM	968.38	514.35	1054.10	342.90	323.85	312.74	155.58	781.05	98.43	31.75	323.85			
2000	38 1/8"	23 1/2"	41 1/2"	16"	13 7/8"	11 1/16"	7"	30 3/4"	3 7/8"	2 1/4"	16"	(2) 16x20x2		
MM	968.38	596.90	1054.10	406.40	352.43	280.99	177.80	781.05	98.43	57.15	406.40			

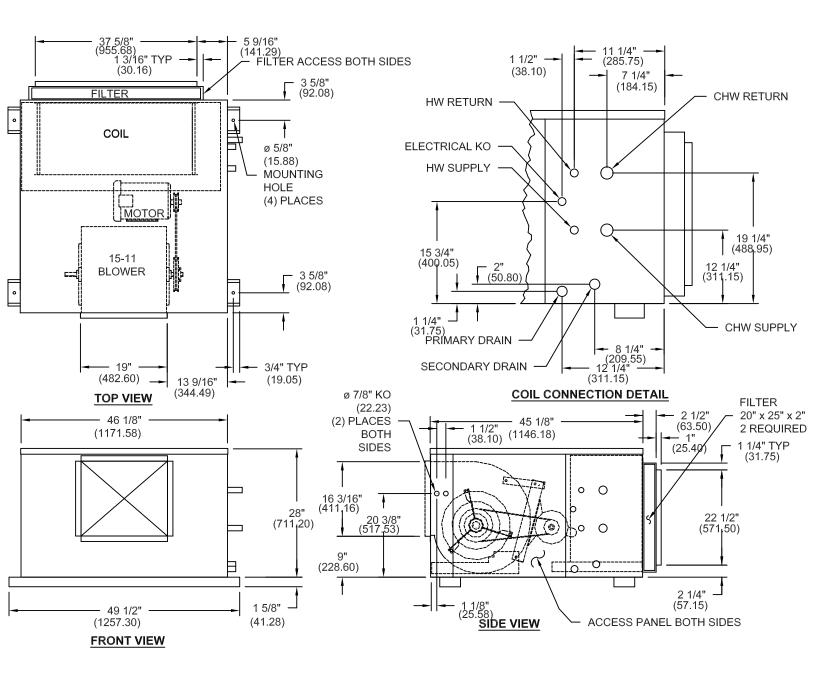

AH 030, RIGHT HAND SHOWN IN (MM)

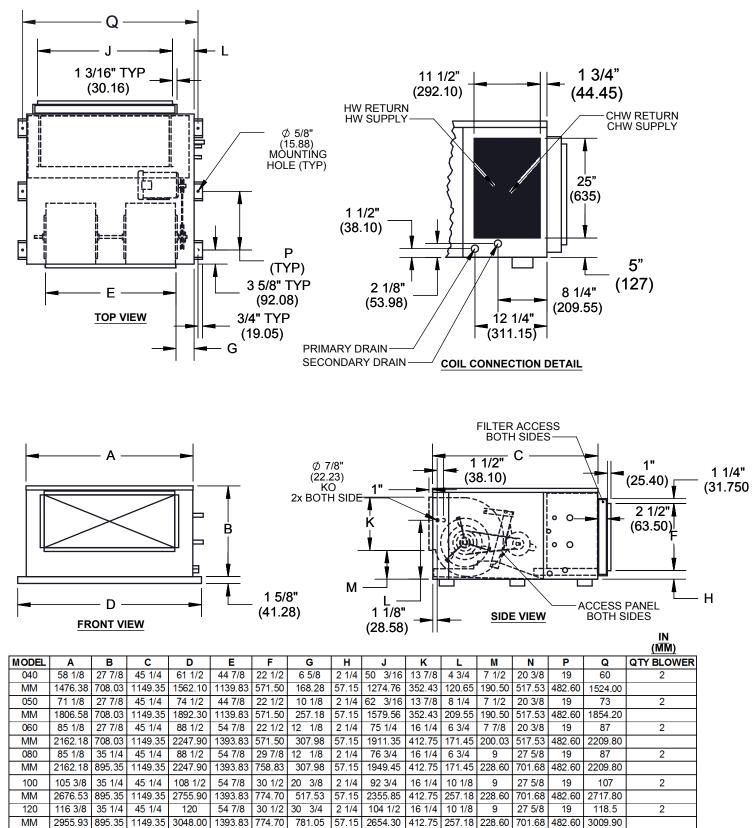

D101303

If the unit has Electric Heat, the Duct Heater is shipped loose and field mounted.

- Right-hand unit shown, left-hand unit opposite.
- Coil connections determined by facing the supply-air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder-coated epoxy with a 1/4" thick closed-cell insulation and has 3/4" to 1" NPT primary and (Optional) secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy-gauge, galvanized steel. Coil connections: range from 1/2" to 2". See Specification Guide.