



NAT.  
GAS  
& LP

10  
YEAR  
WARRANTY

# COUNTERFLOW

## DIRECT VENT & TOP VENT WALL FURNACE

The Cozy Counterflow series features an integrated blower for floor-to-ceiling circulation of heat throughout the room or home. Optional outlet accessories allow it to heat up to three rooms.

### TOP-VENT COUNTERFLOW

Models may be recessed into the stud space or surface-mounted and vented vertically through the ceiling and roof.

### DIRECT-VENT COUNTERFLOW

Having a sealed combustion chamber, our Direct-Vent Counterflow Furnaces use only outside air for combustion. All by-products of combustion are discharged to the outside through the wall vent. All venting materials are included with these models.

### FEATURES


- Free-standing or recessed mounting
- Multi-room heating with optional outlet kits
- Automatic temperature and safety controls

### TOP & DIRECT-VENT MODEL FEATURES

- Natural or propane models (conversions kits available)
- "Matchless" pilot igniter
- Resettable vent-limit safety switch
- Equipped with a 4' electrical power cord



DESIGNED  
& ASSEMBLED  
IN THE USA  
SINCE 1916

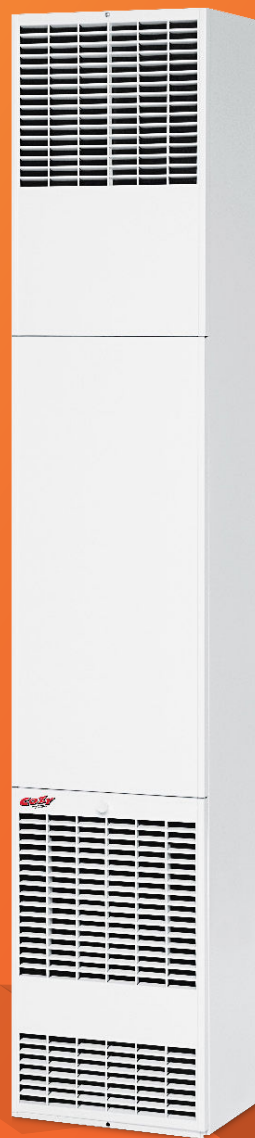

DIRECT-VENT  
40,000 - 60,000  
BTU/hr.



TOP-VENT  
35,000 - 50,000  
BTU/hr.



**Cozy Heating Systems**  
[www.CozyHeaters.com](http://www.CozyHeaters.com)  
1-888-444-1212  
Made in the USA


# COUNTERFLOW

## DIRECT VENT & TOP VENT

### WALL FURNACE



| Model #             | CF351E  | CF352E  | CF501E  | CF502E  | DVCF401D | DVCF402D | DVCF601D | DVCF602D |
|---------------------|---------|---------|---------|---------|----------|----------|----------|----------|
| Type Control        | 24 Volt | 24 Volt | 24 Volt | 24 Volt | 24 Volt  | 24 Volt  | 24 Volt  | 24 Volt  |
| Type Gas            | Propane | Natural | Propane | Natural | Propane  | Natural  | Propane  | Natural  |
| BTU Input / HR      | 35,000  | 35,000  | 50,000  | 50,000  | 40,000   | 40,000   | 60,000   | 60,000   |
| Vent Size (Oval)    | -"      | -"      | 4"      | 4"      | -        | -        | -"       | -"       |
| Gas Inlet           | 1/2"    | 1/2"    | 1/2"    | 1/2"    | 1/2"     | 1/2"     | 1/2"     | 1/2"     |
| Width               | 14 1/8" | 14 1/8" | 14 1/8" | 14 1/8" | 14 1/8"  | 14 1/8"  | 14 1/8"  | 14 1/8"  |
| Depth               | 10 1/4" | 10 1/4" | 10 1/4" | 10 1/4" | 11 3/4"  | 11 3/4"  | 11 3/4"  | 11 3/4"  |
| Height              | 72 1/4" | 72 1/4" | 81"     | 81"     | 77 3/8"  | 77 3/8"  | 87"      | 87"      |
| Amps                | 0.8     | 0.8     | 2.2     | 2.2     | 2.0      | 2.0      | 3.0      | 3.0      |
| Blower Speed / CFM  | 1/ 240  | 1/ 240  | 2 / 350 | 2 / 350 | 1 / 325  | 1 / 325  | 2 / 440  | 2 / 440  |
| Shipping Weight     | 90 lbs  | 90 lbs  | 99 lbs  | 99 lbs  | 126 lbs  | 126 lbs  | 140 lbs  | 140 lbs  |
| LP Conversion Kit # | 7719    | 7718    | 7721    | 7720    | 7729     | 7728     | 7733     | 7732     |

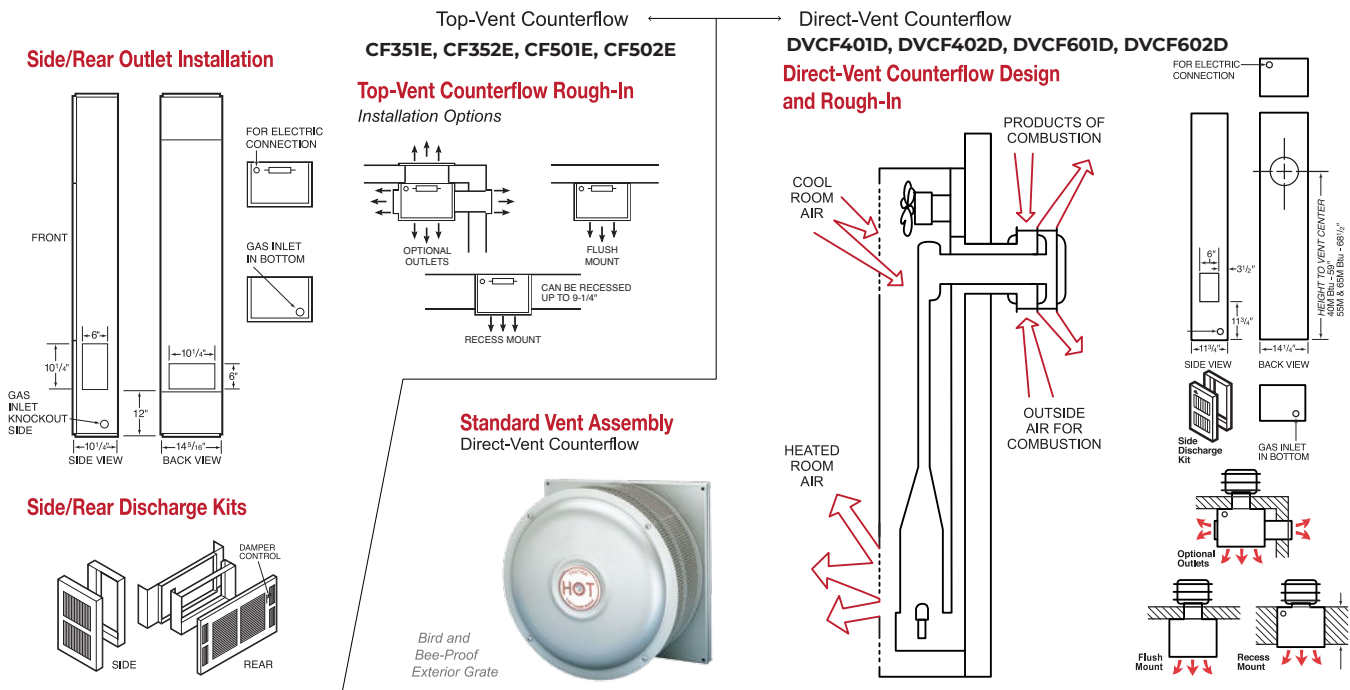

**WARNING:** This product can expose you to chemicals including epichlorohydrin which is known to the State of California to cause cancer and birth defects and/or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

